



Telephony Card

AX-1600P

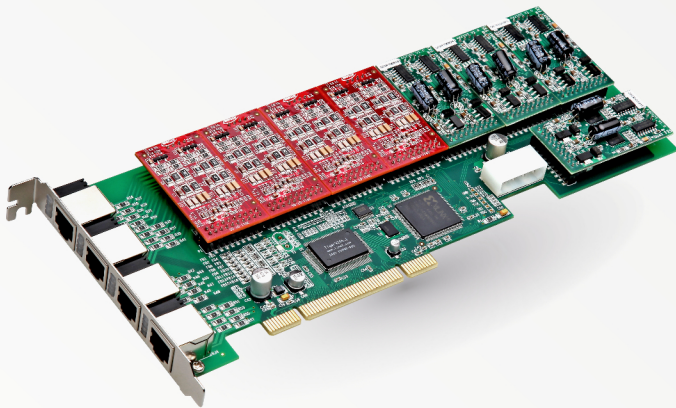

AXE-1600P

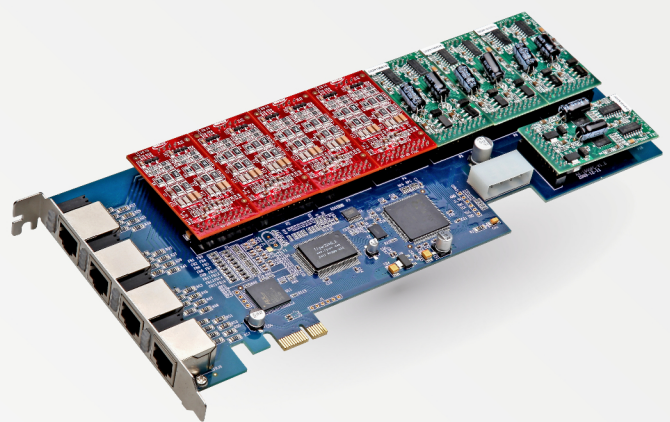

Overview of the AX1600P/AXE1600P

- AX1600P/AXE1600P Asterisk card is the telephony PBX PCI/PCI-E card that supports up to 16 FXO/FXS ports. Using AX1600P/AXE1600P analog card, open source Asterisk PBX and stand alone PC, users can create their SOHO telephony solution which include all the sophisticated features of traditional PBX, and extend features such as voicemail in IP PBX. The FXO and FXS modules are interchangeable to suit various requirements.

Applications

- Asterisk PBX
- IVR system
- Small Office Home Office
- Traditional Calls/VoIP Calls
- Conference

Features

- Analog card for Asterisk PBX
- Support Zaptel and Dahdi driver
- Support up to 16 FXO/FXS analog channels
- Suitable for SOHO PBX / VoiceMail / IVR.
- Caller ID and Call waiting
- Conference

PCI Card Dimension

- AX1600P: 264mm (length) × 103mm (height)
- AXE1600P: 264mm (length) × 110mm (height)

Hardware Requirement

- 500-Mhz Pentium III
- 64MB RAM
- AX1600P: 3.3V or 5V PCI 2.2 slot
- AXE1600P: PCI-E slot