


Telephony Card

AXE1DL

■ Overview of the AXE1DL

AXE1DL Asterisk card is the telephony PCI-E card which supports one ISDN PRI E1/T1/J1 port, optional with teleco-grade hardware echo cancellation module. Using AXE1DL digital PRI card, open source Asterisk PBX and stand alone PC, users can create their IP PBX telephony solution which includes all the sophisticated features of traditional PBX, and extended features such as voicemail in IP PBX. With low profile design, the AXE1DL is suitable for 2U server.

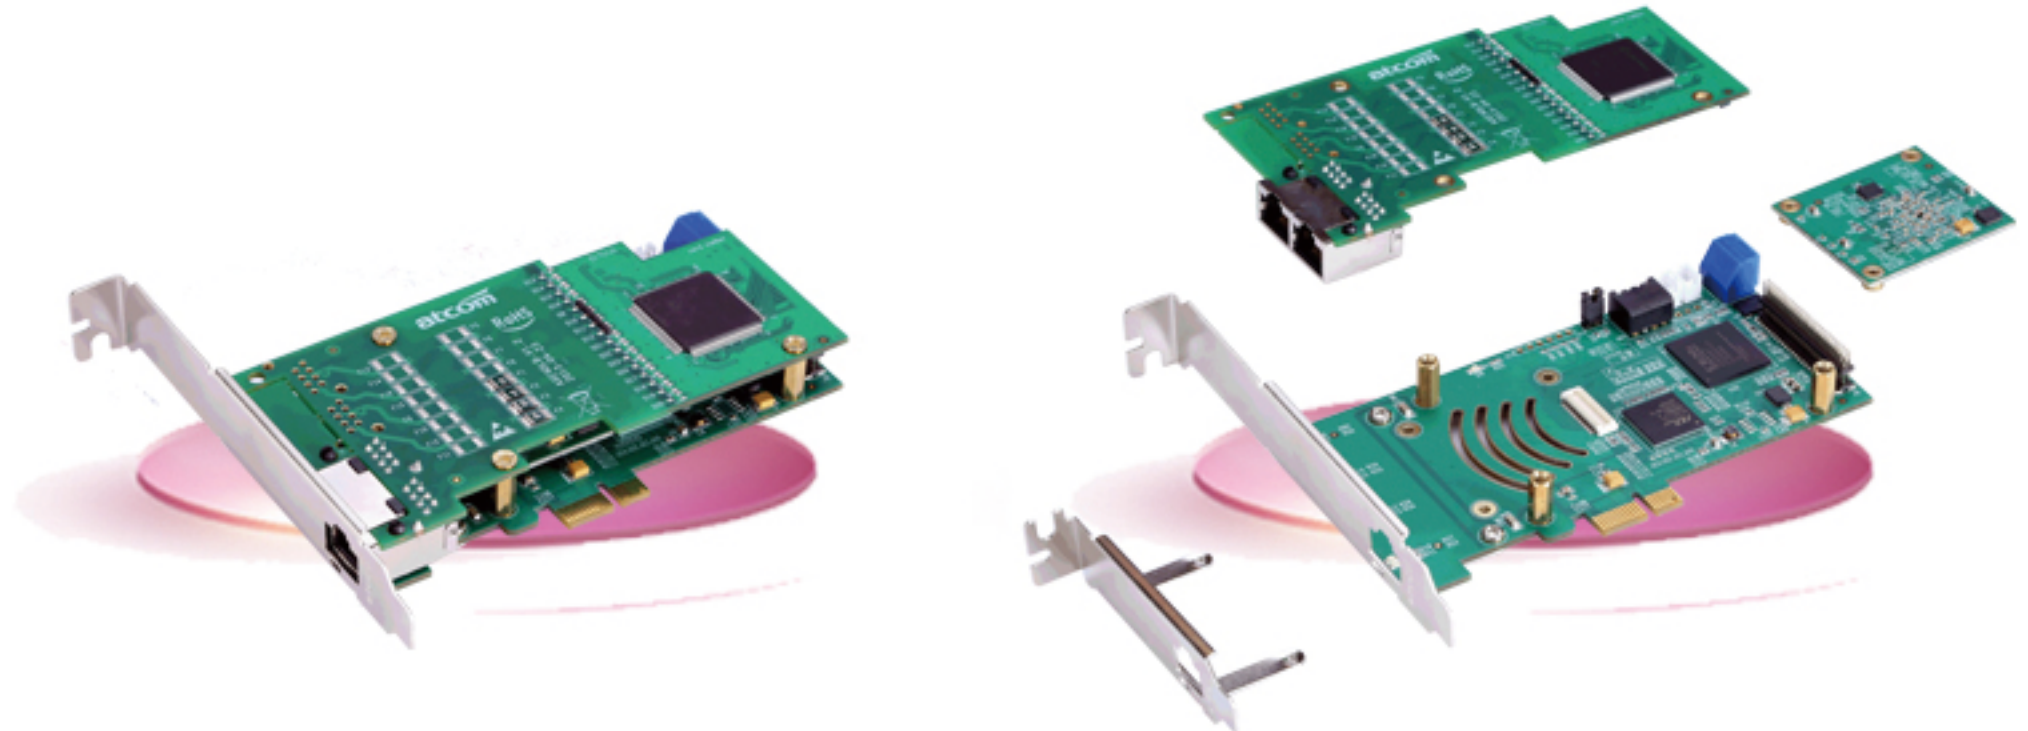

■ Optional DSP Hardware Echo Cancellation Module

- G.168-2002 echo cancellation in hardware
- 1024 taps/128 ms tail per channel on all channel densities
- DTMF decoding and tone recognition
- Voice quality enhancement: music protection, acoustic echo control, and adaptive noise reduction
- Does not increase the physical size of the card, and no additional slot is required

■ Applications

- ISDN PRI IP PBX
- ISDN least cost router
- Calling Card Platforms
- IVR system
- Call Center
- Traditional Calls/VoIP Calls Conference
- VoIP Gateway
- Callback Service

■ Voice Modes

- Pri CPE and PRI NET:
- EuroISDN
- 4ESS(AT&T)
- 5ESS(Lucent)
- DMS100

■ Features

- One ISDN PRI E1/T1/J1 port
- Support Dahdi, Zaptel(need to patch)
- Support Asterisk, Freeswitch
- Support Elastix directly
- Trixbox, AsteriskNOW, PBX in a Flash by reinstalling Dahdi
- 100% compatible with all features of Asterisk PBX
- 32-bit bus master DMA data exchanges across PCI interface at 132 Mbytes/sec for minimum host processor intervention
- Supports standard telephony and data protocols(IncludingPRI, CAS, CCS for voice and PPP, HDLC, Cisco HDLC and Frame Relay for data modes)
- Supports chan_ss7 and Openr2
- Optional hardware echo cancellation
- Low profile design, suitable for 2U server.

■ Hardware Requirement

- 1.6-Ghz Pentium IV
- 512 MB RAM
- PCI-E slot

■ AXE1DLCard Dimension

- 120mm (Length)*64mm (height)

■ Operating System

- Linux (all versions, releases and distributions from 1.0 up)