


Telephony Card

AXE2DL

■ Overview of the AXE2DL

AXE2DL Asterisk card is the telephony PCI-E card which supports two ISDN PRI E1/T1/J1 ports, optional with teleco-grade hardware echo cancellation module. Using AXE2DL digital PRI card, open source Asterisk PBX and stand alone PC, users can create their IP PBX telephony solution which includes all the sophisticated features of traditional PBX, and extended features such as voicemail in IP PBX. With low profile design, the AXE2DL is suitable for 2U server.

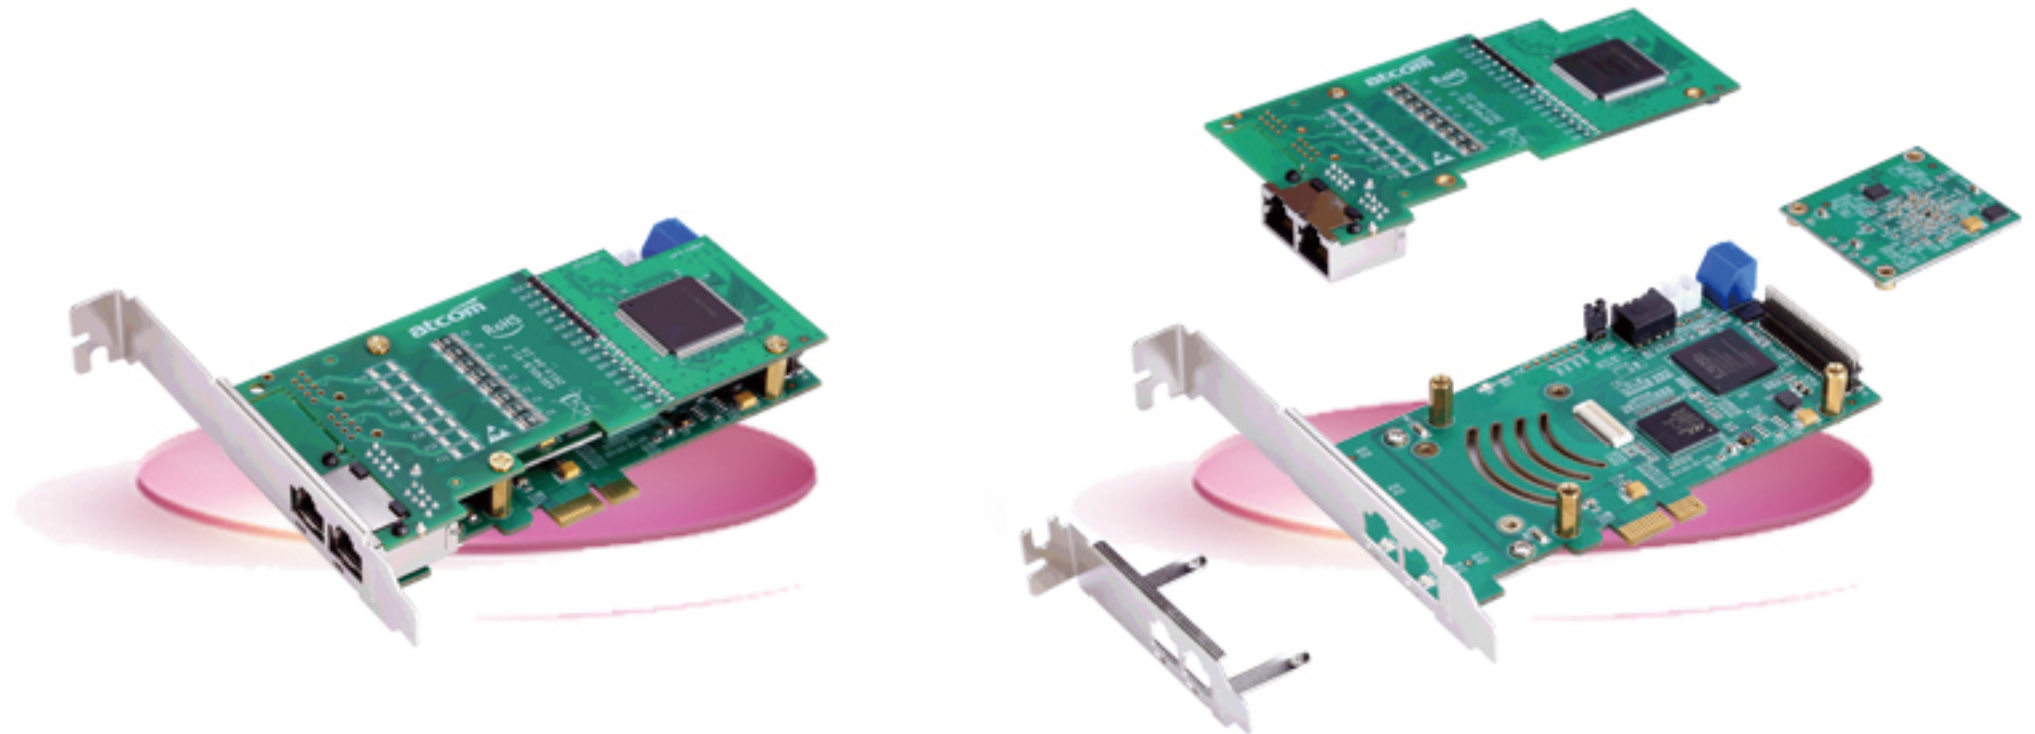

■ Optional DSP Hardware Echo Cancellation Module

G.168-2002 echo cancellation in hardware
 1024 taps/128 ms tail per channel on all channel densities
 DTMF decoding and tone recognition
 Voice quality enhancement: music protection, acoustic echo control, and adaptive noise reduction
 Does not increase the physical size of the card, and no additional slot is required

■ Applications

- ISDN PRI IP PBX
- ISDN least cost router
- Calling Card Platforms
- IVR system
- Call Center
- Traditional Calls/VoIP Calls Conference
- VoIP Gateway
- Callback Service

■ Voice Modes

- Pri CPE and PRI NET:
- EuroISDN
- 4ESS(AT&T)
- 5ESS(Lucent)
- DMS100

■ Features

- Two ISDN PRI E1/T1/J1 ports
- Support Asterisk, Freeswitch, Yate
- Support Elastix, Trixbox, AsteriskNOW, PBX in a Flash
- 100% compatible with all features of Asterisk PBX
- 32-bit bus master DMA data exchanges across PCI interface at 132 Mbytes/sec for minimum host processor intervention
- Supports standard telephony and data protocols (Including PRI, CAS, CCS for voice and PPP, HDLC, Cisco HDLC and Frame Relay for data modes)
- Supports chan_ss7 and Openr2
- Optional hardware echo cancellation
- Low profile design, suitable for 2U server.

■ Hardware Requirement

- 1.6-Ghz Pentium IV
- 512 MB RAM
- PCI-Eslot

■ AXE2DL Card Dimension

- 120mm (Length)*64mm (height)

■ Operating System

- Linux (all versions, releases and distributions from 1.0 up)